

1 **Combination of a sorting grid and a square mesh panel to**
2 **optimize size selection in the North-East Arctic cod (*Gadus***
3 ***morhua*) and redfish (*Sebastes* spp.) trawl fisheries**

4 Manu Sistiaga^{1*&}, Bent Herrmann^{1,2&}, Eduardo Grimaldo^{1&}, Roger B. Larsen², Leonore
5 Olsen³, Jesse Brinkhof², Ivan Tatone²

6 ¹SINTEF Ocean, Brattørkaia 17C, N-7010 Trondheim, Norway

7 ²The Arctic University of Norway, UiT, Breivika, N-9037 Tromsø, Norway

8 ³SINTEF Nord, Storgata 118, 9008 Tromsø, Norway

9 *Corresponding author. Tel: +4791663499

10 &Equal authorship

11 E-mail address: manu.sistiaga@sintef.no

12 **Abstract**

13 Sorting grids and square mesh panels are the two most-applied technical devices to
14 supplement codend size- and species-selection in demersal trawls. In the Barents Sea gadoid
15 fishery, the compulsory size-selectivity system comprises a mesh section with a sorting grid
16 followed by a diamond mesh codend. We tested the size-selective performance of a new
17 sorting section that comprised a sorting grid combined with a square mesh panel as a potential
18 alternative for the grid sections currently in use. The new sorting section was shorter and
19 therefore more maneuverable than the existing sorting grid sections. The investigation was
20 carried out on cod and the bycatch species redfish. The grid was found to contribute to the
21 largest proportion of fish release, and the release through the square mesh panel was low. But,
22 the results showed that the grid was successful at guiding fish not escaping through the grid to
23 a second selection process in the panel. However, the square mesh panel did not result on the
24 intended release efficiency except for the smallest sizes of fish, most likely because the
25 guiding angle of the grid and the square meshes in the panel used did not provide a suitable

26 escape path for the desired size range of fish. Therefore, optimizing the mesh size/shape in the
27 panel and/or the guiding angle for the grid potentially could lead to the desired selectivity
28 pattern in the new sorting section.

29 *Keywords:* Bottom trawl; Size selectivity; Grid size selection; Fish behavior.

30 **Introduction**

31 In many demersal trawl fisheries, size and/or species selection in the codend has been found
32 to be suboptimal. Therefore, in many of these fisheries, codend selection is supplemented by
33 an additional selection device installed before, or in, the codend. Square mesh panels
34 (Broadhurst, 2000; Catchpole and Revall, 2008; Alzorriz et al., 2016; Brčić et al., 2016) and
35 sorting grids (Larsen and Isaksen, 1993; Sistiaga et al., 2010; Herrmann et al., 2013; Lövgren
36 et al., 2016) are the two most-broadly applied technical devices to supplement codend
37 selection. In the Barents Sea, for example, the selectivity of a 130-mm diamond mesh codend
38 is supplemented by the compulsory use of a sorting grid section installed before the codend.
39 Fishermen can use three different grid section designs and all grids need to have a minimum
40 bar spacing of 55 mm. The first grid section design introduced in the fishery, the Sort-X
41 (Larsen and Isaksen, 1993), is rarely used by fishers. This design is composed of two steel
42 grids and a canvas section that make it heavy (ca. 300 kg) (Fig. 1), difficult to maneuver, and
43 dangerous to use, especially in bad weather. The other two grid systems, one made with two
44 grids known as Flexigrid (Sistiaga et al., 2016) and the other a single steel grid system called
45 Sort-V (Jørgensen et al., 2006), are both lighter and easier to handle (Fig. 1). The choice
46 between the systems is usually the personal preference of the skipper.

47 FIG. 1

48 Sorting grids have been compulsory in the Barents Sea gadoid fishery since 1997 and even
49 though there has been improvement in their design, both fishermen and the authorities are

50 constantly looking for designs that can make the grid section more efficient regarding size
51 selectivity and easier to maneuver (lighter and smaller). In this study, we tested the size-
52 selective performance of a new fish-sorting design that combined a sorting grid and square
53 mesh panel as a potential alternative design. In this new design, the sorting grid was installed
54 upside down compared with the Sort-V section and the top panel was substituted by a square
55 mesh panel. The potential advantage of this design is hypothesized to be improved fish sorting
56 efficiency. With traditional sorting grid designs, fish are required to make contact with the
57 grid(s) to have a chance to escape. However, some fish may respond with avoidance behavior
58 to the grid(s) and therefore only a fraction of the fish is size-sorted. This fraction is quantified
59 by the grid contact parameter in selectivity studies (Sistiaga et al., 2010; Larsen et al., 2016).
60 In the new grid system, a steel grid was installed in the lower panel to act as the first sorting
61 mechanism. Fish that respond to the grid with an avoidance response are guiding upwards
62 towards the second sorting device that consists of a square mesh panel. In this sense, the new
63 design combines the most commonly applied sorting devices in trawls into one system, where
64 the second device is meant to sort at least part of those fish that avoid the first device. The
65 main hypothesis was that this combination would improve the sorting efficiency compared to
66 traditional grid systems that cannot provide an additional sorting opportunity for fish.

67 FIG. 1

68 Some studies have proven that guiding fish towards a square mesh panel increases its sorting
69 efficiency significantly (e.g. Herrmann et al., 2014). Given that the section has only one grid
70 and does not require any additional lifting panel, it is substantially shorter than the traditional
71 Flexigrid and Sort-V sections, which makes it more maneuverable and less likely to suffer
72 from reduced water flow (Gjørund, 2012).

73 The investigation was carried out for North-East Arctic cod (*Gadus morhua* L.) and redfish
74 (*Sebastes* spp.), which are the main target and bycatch species, respectively, in the Barents

75 Sea fishery (Yaragina et al., 2011). On average, approximately 70% of the North-East Arctic
76 cod in this fishery are caught with demersal trawls, highlighting the potential importance of
77 this new gear for the fishery. Two species of redfish have traditionally been harvested in the
78 Barents Sea: the beaked redfish (*Sebastes mentella*) and the golden redfish (*Sebastes*
79 *marinus*). The stock of golden redfish is considered to be below sustainable levels and direct
80 fishing for this species is not permitted (ICES, 2016). Beaked redfish can be commercially
81 harvested (Planque and Nedreaas, 2015), however, directed fishing for this species is
82 normally carried out with pelagic trawls and therefore, to avoid incidental catches of golden
83 redfish as high release as possible of redfish from bottom trawls is desired.

84 The objective of this study was to investigate if a new sorting design can improve trawl
85 selectivity compared to the grid-only systems currently in use. Specifically, we aimed to
86 answer the following questions.

- 87 • To what extent do the grid and square mesh panel each contribute to the combined size
88 selection in the sorting system?
- 89 • How well do the grid and the square mesh panel perform individually regarding size
90 selectivity compared with the combined sorting system?
- 91 • How do cod and redfish behave in the new combined sorting system?
- 92 • How does the new combined sorting system perform compared with the size
93 selectivity of the grid-alone systems currently in use?

94 **Material and methods**

95 **Research vessel, study area, and gear set-up**

96 The experimental fishing was conducted on board the research vessel ‘Helmer Hanssen’ (63.8
97 m LOA and 4080 HP) in a fishing area outside the coast of Finnmark (North of Norway)

98 between 70°29'–70°52'N and 30°08'–31°44'E. All data included in the study were collected
99 from the 6th to the 15th of March 2017.

100 The Alfredo No. 3 two-panel Euronete trawl used in the experiments was built entirely of 155
101 mm nominal mesh size (nms) polyethylene (PE) netting (single Ø 4 mm braided knotted
102 twine). The trawl had a headline measuring 36.5 m, a fishing line measuring 19.2 m, and a
103 454 mesh fishing circle. It was rigged with a set of bottom trawl doors (Injector Scorpion
104 type, 8 m², 3200 kg each), 60 m sweeps, and 111 m ground gear. The sides of the ground gear
105 had five 53 cm (diameter) steel bobbins equally distributed on a 46 m chain (diameter = 19
106 mm), and the center of the ground gear had a 19 m long rockhopper (with 53 cm rubber discs)
107 that was attached to the fishing line of the trawl.

108 The new sorting design comprised a four-panel mesh section made of 138-mm nms Euroline
109 Premium PE knotted netting (Polar Gold) (single Ø 8 mm braided twine). It was 29.5 meshes
110 long (approx. 4.6 m) and measured 80 meshes in circumference (approx. Ø 1.2 m). All four
111 selvages were strengthened by 30 mm Danline PE ropes. A standard 55 mm bar spacing
112 sorting grid, Sort-V type (1650 mm high x 1234 mm wide), was attached inside the section
113 with an inclination angle of 23°± 2° (Fig. 2). The square mesh panel, comprising single Ø 8
114 mm braided knotless ultracross netting, was 50-meshes long (~3.5 m) and 17 meshes wide (~
115 1.2 m) (Fig. 2). The average mesh size in the panel was 144.30 ± 2.43 mm (mean ± SD), from
116 40 measurements taken with an ICES gauge (Westhoff et al. 1962).

117 FIG. 2

118 To attach the four-panel sorting section to the trawl belly to the we constructed a transition
119 section. The section, which was 35.5 mesh long, was built with 138 mm nms Euroline
120 Premium PE knotted netting (single Ø 8.0 mm braided twine). A four-panel diamond-mesh
121 codend was then attached after the sorting section. It was made from 138 mm nms Euroline

122 Premium PE knotted netting (Polar Gold) (single Ø 8-mm braided twine). The codend was 40
123 meshes long (approx. 6.2 m) and had 80 meshes of circumference (approx. Ø 1 m). All four
124 codend selvages were strengthened by 30 mm Danline PE ropes. The round straps were
125 placed every 1.20 m apart and had a length of 6.9 m, which limited the expansion of the
126 codend to 2.20 m at that point.

127 The purpose of the trials was to evaluate the size selection in the sorting section. Therefore,
128 the codend was blinded by an inner net of 52 mm nms Euroline Premium PE knotted netting
129 (Ø 2.2 mm single twine) with 300 meshes around. The number of meshes in the inner net
130 ensured low mesh opening to retain fish. The use of round straps, which limited the expansion
131 of the codend, also contributed to the low mesh opening.

132 We applied the Covered-gear method (Wileman et al., 1996) and used two identical covers to
133 collect all fish escaping through the grid (grid cover) and the square mesh panel (panel cover)
134 (Fig. 3). The front part of the covers was made of square meshes of Dyneema netting
135 (knotless 210/54 braided twine). The purpose of this netting was twofold: (i) to ensure that the
136 water flow outside the trawl did not push the cover against the square mesh panel or the grid
137 outlet; and (ii) to create enough water flow through the meshes to push the fish entering the
138 covers to the cover codend. The back part of the covers comprised of Polyamid PA diamond
139 mesh netting (2.5-mm Ø knotted braided twine). The average mesh size of the covers was
140 estimated from 80 measurements (2×20 mesh rows were measured in each of the covers
141 following guidelines of Wileman et al., 1996) taken with an ICES gauge (Westhoff et al.
142 1962), and resulted in a mean mesh size of 57.41 ± 0.97 mm (mean \pm SD). In the last 2 m of
143 the cover, we installed a small mesh inner net made of approximately 10 mm meshes to
144 ensure the smallest fish would not be able to escape from the cover net. The total length of
145 both covers was approximately 18 m. At the front of the panel cover, we attached six plastic

146 floats (\varnothing 20 cm) to secure its expansion and to ensure that it stayed clear from the panel. At
147 the grid cover, chains weighing 1.6 kg were fixed to its lower panel to secure its opening.

148 FIG. 3

149 All cod and redfish above 10 cm (total length) caught in the codend or covers were measured
150 to the nearest centimeter. There was no subsampling. Golden redfish and beaked redfish are
151 similar in morphology and shape, and difficult to distinguish especially at smaller sizes
152 (Herrmann et al., 2012). Further, they are often analyzed together as *Sebastes* spp. because the
153 size-selective properties of the sorting devices are practically the same for both species
154 (Herrmann et al., 2012). Thus, all redfish in the study were analyzed as a single species.

155 To study fish behavior in the grid section, we used a camera system in three of the hauls. This
156 comprised a GoPro camera and two battery powered red LED lights in a stainless-steel frame.
157 Red light was chosen because it is thought to affect fish behavior less than more-traditionally
158 used white light (Anthony and Hawkins, 1983). The camera was protected by a stainless-steel
159 housing with a depth limit of 300 m.

160 **Modeling the size selectivity for fish entering the sorting section**

161 We adopted the model used by Larsen et al. (2016). This model is a dual sequential model
162 that, when adapted to our sorting system, can be described mathematically by Equation (1).
163 Equation (1) quantifies the fish length (l)-dependent probability of escaping through the grid
164 $e_{grid}(l)$, of escaping through the square mesh panel grid $e_{panel}(l)$, and of being retained in the
165 blinded codend $r_{codend}(l)$.

$$\begin{aligned}
 e_{grid}(l) &= \frac{C_{grid}}{1.0 + \exp\left(\frac{\ln(9)}{SR_{grid}} \times (l - L50_{grid})\right)} \\
 166 \quad e_{panel}(l) &= \left(\frac{C_{panel}}{1.0 + \exp\left(\frac{\ln(9)}{SR_{panel}} \times (l - L50_{panel})\right)} \right) \times \left(1.0 - \frac{C_{grid}}{1.0 + \exp\left(\frac{\ln(9)}{SR_{grid}} \times (l - L50_{grid})\right)} \right) \quad (1) \\
 r_{codend}(l) &= 1.0 - e_{grid}(l) - e_{panel}(l)
 \end{aligned}$$

167 In Equation (1), C_{grid} quantifies the fraction of fish entering the section that makes contact
 168 with the grid to obtain a size-dependent probability of escaping through it (see Larsen et al.
 169 (2016) for further details). For those fish, $L50_{grid}$ and SR_{grid} are the selectivity parameters
 170 assuming a *Logit* size selection model (Wileman et al., 1996). For the fish that reach the zone
 171 of the panel, meaning that they have not previously escaped through the grid, C_{panel} quantifies
 172 the fraction of fish that makes selectivity contact with it and is subject to a size-dependent
 173 probability of escape through this square mesh panel. For the fish making selectivity contact,
 174 $L50_{panel}$ and SR_{panel} are the selectivity parameters in the assumed *Logit* size selection model.
 175 The size selectivity in the sorting section is therefore fully described by the parameters C_{grid} ,
 176 $L50_{grid}$, SR_{grid} , C_{panel} , $L50_{panel}$, and SR_{panel} (Equation (1)). The selection properties of the
 177 individual devices, grid, and square mesh panels are then described by the parameters C_{grid} ,
 178 $L50_{grid}$, and SR_{grid} , and C_{panel} , $L50_{panel}$, and SR_{panel} , respectively, applied in a *CLogit* size
 179 selection model. This model and parameters subsequently can be applied to predict the size
 180 selectivity for the devices if used individually (see Larsen et al. (2016) for further details for
 181 applying the model this way).

182 For the whole grid section (lower and upper grid combined), $L50_{comb}$ and SR_{comb} represent the
 183 overall selectivity parameters being estimated from Equation (1) using the numerical method
 184 described by Sistiaga et al. (2010).

185 **Estimation of the selection parameters**

186 The estimation was carried out separately for cod and redfish, as described below. The values
 187 for the parameters for the overall selection model (1) (i.e., C_{grid} , $L50_{grid}$, SR_{grid} , C_{panel} , $L50_{panel}$,
 188 and SR_{panel}) were obtained using Maximum Likelihood estimation based on the experimental
 189 data summed over hauls j (1 to m) by minimizing Equation (2):

$$190 \quad -\sum_l \sum_{j=1}^m \{ng_{l,j} \times \ln(e_{grid}(l)) + np_{l,j} \times \ln(e_{panel}(l)) + nc_{l,j} \times \ln(r_{codend}(l))\} \quad (2)$$

191 where $ng_{l,j}$, $np_{l,j}$, and $nc_{l,j}$ denote the number of fish caught in haul j with length l that were
 192 collected in the cover for the grid and square mesh panel and the codend inner net,
 193 respectively (Fig. 3). Goodness of fit for the model was tested based on the p-value, model
 194 deviance versus degrees of freedom, and inspection of the ability of the model curves to
 195 reflect the trends in the length-based data (see Wileman et al., 1996 for further information).

196 The Maximum Likelihood estimation based on Equation (2) using Equation (1) required
 197 summing the experimental data over hauls. However, this does not consider explicit variation
 198 in selectivity between hauls, referred to as between-haul variation (Fryer, 1991). Therefore, to
 199 account for between-haul variation in the uncertainty for the estimated size selection, the
 200 Efron 95% percentile confidence intervals (CIs) (Efron, 1982) were estimated for the model
 201 parameters and curves described by $e_{grid}(l)$, $e_{panel}(l)$, and $r_{codend}(l)$. The uncertainty was
 202 estimated using a double bootstrap method. The analysis was conducted using the software
 203 tool SELNET (Herrmann et al., 2012) and applied 1000 bootstrap iterations for the estimation
 204 of the CIs.

205 With the *CLogit* model and the values for the selection parameters for the grid (C_{grid} , $L50_{grid}$,
 206 SR_{grid}) and the panel (C_{panel} , $L50_{panel}$, SR_{panel}), we obtained the size selection curves for the two
 207 grids in stand-alone deployments. The bootstrap procedure described above, was also applied
 208 to obtain 95% confidence limits for the stand-alone size selection curves for the grid and
 209 the square mesh panel.

210 Inference on evidence for significant difference in size selectivity between selection curves
211 was based on inspecting the curves for length classes with lack of overlap between the 95%
212 confidence bands.

213 **Results**

214 During the sea trials, we completed 20 valid hauls and length-measured 2958 cod and 1331
215 redfish (Table 1). The length spans varied between 10 and 120 cm for cod, and 10 and 64 cm
216 for redfish.

217 TABLE 1

218 **Selectivity results**

219 Assessment of the size selection of cod and redfish was conducted by fitting the model
220 described in Equation (1) to the haul data summarized in Table 1. The estimated selectivity
221 parameters and the fit statistics are provided in Table 2, while Fig. 4 shows the fit of the
222 model to the experimental data.

223 TABLE 2

224 FIG. 4

225 Fig. 4 and Table 2 show that model (1) adequately describes the data for both cod and redfish.
226 The curves estimated for grid escape, square mesh panel escape, and codend retention also
227 followed the trend in the corresponding experimental data well (Fig. 4). The p-values for the
228 model were >0.05 (Table 2), implying that the observed discrepancy between experimental
229 points and the modeled curves could be a coincidence. Therefore, we are confident that the
230 model results can be applied to describe and investigate the size selection of both cod and
231 redfish in the sorting section.

232 Approximately 50% (CI: 41 - 71 %) of the smaller cod (<40 cm) were estimated to escape
233 through the grid (Fig. 4a). This limited percentage is reflected in the C_{grid} value and shows
234 that, on average, 49% of the cod entering the section did not contact the grid (Table 2). The
235 properties of the grid meant that the escape rate of cod longer than 40 cm gradually decreased,
236 leading to no release of cod longer than 60 cm (Fig. 4a). In model (1), this was quantified by
237 the parameters $L50_{grid} \sim 48$ cm and $SR_{grid} \sim 7$ cm (Table 2). For the smallest redfish (<20 cm),
238 the release efficiency of the grid was higher than for small cod, which was reflected in a C_{grid}
239 value of $\sim 86\%$ (Table 2). However, the release rate decreased gradually for redfish in the size
240 range ~ 15 – 52 cm, with no release above this size (Fig. 4d). For the square mesh panel, the
241 release rates were smaller for both cod and redfish compared with the grid, even though, for
242 both species C_{panel} was estimated to be high (Table 2). However, only fish that did not escape
243 through the grid could escape through the square mesh panel. Specifically, it was estimated
244 that the release rate through the square mesh panel for the redfish entering the section would
245 never exceed 14% for any size and that no redfish longer than 35 cm would be released (Fig.
246 4e). The square mesh panel was estimated to release only 5% of cod that were 40 cm long
247 (Fig. 4b). For a 30 cm-long cod, the estimated rate was 14%; however, the lower confidence
248 limit was almost 0%. For cod shorter than 30 cm, the results were inconclusive for the release
249 rate through the square mesh panel because of the low numbers of fish below this size and
250 wide CIs. The size selection for the sorting section overall was represented by the retention
251 probability in the blinded codend (Fig. 4c and 4f). For cod that were 40 cm long, the retention
252 probability was estimated to be $\sim 48\%$, increasing with size until exceeded 95% at 56 cm (Fig.
253 4c). For redfish, the retention probability increased monotonously with size over a wide size
254 range. The retention was estimated to be 8% at 10 cm and 94% at 45 cm (Fig. 4f).

255 To illustrate how well the grid and square mesh panel performed as standalones compared to
256 when used in combination in the new sorting section, we estimated selection curves for this

257 based on model (1) (Fig. 5). For both cod (Fig. 5a) and redfish (Fig. 5c), the estimated
258 selectivity curves for the grid alone were closer to the combined selectivity curves for the
259 sorting section than were the curves for the square mesh panel alone (Fig. 5b, d). This was
260 most obvious for redfish, where the confidence bands were narrow for all sizes of fish. For
261 both cod and redfish, the square mesh panel showed significantly higher retention rates for a
262 wide size range compared with the complete sorting section (Fig. 5b and 5d). This was not the
263 case for the grid as a standalone. These results further illustrate that the grid provides the
264 most-efficient contribution to the overall size selection in this sorting section.

265 FIG. 5

266 To infer how well the new sorting section performed compared with the grid sorting sections
267 currently in use in the fishery, we plotted the size selection for the sorting section tested in
268 this study against results available in the literature for the Sort-V, Flexigrid and Sort-X grid
269 systems (Fig. 6). These comparisons are valid and relevant under the assumption that both the
270 results obtained for the new sorting design (in this study) and for the existing designs (from
271 literature) reflect how the designs size select cod and redfish on average in the commercial
272 fishing situation.

273 For the size selection of cod, the results of the present study were compared with those
274 obtained by Sistiaga et al. (2010) and Grimaldo et al. (2015) with the Sort-V system (Fig. 6a),
275 and by Sistiaga et al. (2016) with the Flexigrid system (Fig. 6b). When compared with the
276 Sort-V system, it was evident that the new sorting section had a higher retention rate for a
277 wide range of sizes of cod both below and above the minimum targeted size of 44 cm.
278 Compared with the Flexigrid (Fig. 6b), the new sorting section resulted in a similar size
279 selection for all sizes of cod, with no significant difference for any length class. Regarding
280 redfish, the new sorting section had significant higher retention above the minimum target

281 size of 30 cm compared with results for the Sort-V system obtained by Herrmann et al.
282 (2013). For redfish shorter than 30 cm, the confidence bands overlapped (Fig. 6c). Compared
283 with previous results obtained with the Sort-X grid system (Herrmann et al., 2013), the
284 comparison indicated that the retention probability for redfish both below and above the
285 minimum target size was higher with the new sorting section. However, because the results
286 provided for the Sort-X by Herrmann et al. (2013) had no confidence bands, inferences based
287 on the comparison of these cases are only indicative.

288 FIG. 6

289 **Underwater recordings**

290 The underwater recordings showed that the structure and geometry of the section worked as
291 intended during trawling. There was no observation of a masking effect from the covers or
292 clogging in the grid nor the panel.

293 We studied the behavior of cod and redfish in detail in one of the three hauls recorded (65
294 min. of duration). This was the only recording where the position of the camera (looking
295 towards the grid) (Fig. 7-8) and where underwater conditions allowed species to be clearly
296 distinguished, especially cod and haddock. Most cod entered the section closest to the bottom
297 panel and, then tried to swim downwards seeking passage through the grid (quantified by C_{grid}
298 in the selectivity analysis) (Fig. 7 a-d, e-h). This downward swimming behavior of cod is well
299 documented in earlier studies (e.g. Engås and Godø, 1989; Wardle, 1993; Grimaldo et al.,
300 2017) and was observed for 80.3 % (95% CI: 70.4-88.7 %) of the 71 cod observed entering
301 the section. Compared with cod, redfish entered the section relatively evenly distributed, a
302 behavior also documented in the literature (e.g. Larsen et al., 2016). Furthermore, the
303 behavior conclusions of redfish drawn from our quantitative data were corroborated by the
304 underwater recordings, because they showed that redfish were effective at escaping through

305 the grid (Fig. 4d). The recordings also showed that redfish that did not manage to escape
306 through the grid sought upwards escape through the panel meshes (Fig. 8a-d, e-h). This active
307 behavior inside the section, which is similar to the well-documented behaviour of haddock
308 (e.g. Winger et al., 2010; Sistiaga et al., 2016), is not as well documented for redfish and was
309 observed for 84.21 % (95% CI: 68.4-100 %) of the redfish 19 identified in the recordings.

310 FIG. 7

311 FIG. 8

312 **Discussion**

313 In this investigation, we tested a new fish-sorting design comprising a sorting grid and a
314 square mesh panel in the Barents Sea gadoid fishery. The aim was to investigate whether such
315 a section could provide any advantage in terms of the size selectivity of cod and redfish
316 compared with the compulsory grid-only systems currently in use the fishery. When
317 compared with the compulsory grid systems the new system has the advantages of being
318 shorter, lighter and therefore more maneuverable and safe. The section is also less complex in
319 construction than the existing grid sections, which makes it easier to maintain and repair. An
320 additional advantage is that the size selection properties of the section can be partially
321 modified with interchangeable square mesh panels of different size/shape.

322 For cod, the overall selectivity of the new tested section resulted in a $L50_{comb}$ value that was
323 lower than desired and, on average, lower (41.41 cm) than the minimum target size for cod in
324 the Barents Sea (44 cm). Furthermore, the upper confidence limit for the value was just above
325 44 cm (44.39 cm), indicating that, for the system to be in line with current legislation, $L50_{comb}$
326 would have to be increased (Table 2). When compared specifically with the Sort-V section,
327 the tested section retained significantly more undersized cod than the Sort-V section (Fig. 6a).

328 This can be a major disadvantage for the tested section, especially in areas where the juvenile
329 cod population is abundant, although juveniles not released from the section may still escape
330 through the codend meshes. An advantage with the tested system was that it retained
331 significantly more commercial-sized cod than the Sort-V grid, which, in areas with low
332 juvenile densities, would make the gear commercially more efficient according to current
333 legislation. Previous studies showed that the Flexigrid system is less efficient at releasing
334 juvenile fish than the Sort-V system (Sistiaga et al., 2016). In the current study, we observed
335 that, although differences between the Sort-V system and the new sorting section were clear,
336 there were no significant differences between the Flexigrid and the new sorting system,
337 neither for the fish shorter than 44 cm nor for the fish longer than 44 cm (Fig. 6b). Assuming
338 that the selective properties of the legal and compulsory Flexigrid system are satisfactory for
339 cod from a management point of view, which, according to the results obtained by Sistiaga et
340 al. (2016), is questionable, then the system presented in this study could also be a valid option
341 for this fishery.

342 In terms of redfish, the average $L50_{comb}$ was also lower (29.33 cm) than the minimum target
343 size for redfish in the fishing area (30 cm). Furthermore, the upper confidence interval was
344 just under 2 cm bigger than the minimum size, demonstrating that, for the gear to be in line
345 with current regulations for redfish, $L50_{comb}$ would have to be increased (Table 2). The
346 differences indicated in Fig. 6c show that, while the new sorting section did not retain
347 significantly more undersized redfish than the Sort-V system (Herrmann et al. 2013), it
348 retained substantially more commercially valuable sizes of this species. This demonstrates
349 that, from a commercial point of view, it could be more profitable to use the new sorting
350 system than the Sort-V grid system without adding any challenges from a management point
351 of view, especially in areas where beaked redfish is most abundant.

352 The results show clearly that the fish-sorting design should be improved to enhance the
353 selectivity of the smallest sizes of cod and redfish. Whereas the grid installed with the
354 opening in the lower panel was not found to perform as well as the grid with the opening in
355 the upper panel combined with a lifting panel (which is the compulsory Sort-V design), the
356 contribution of the panel to the release of these two species was found to be a major issue.
357 Especially for redfish, the release efficiency for the square mesh panel was low (Fig. 4e). The
358 C_{panel} values estimated were high, implying that redfish did make contact with panel when
359 they were not able to escape through the grid (Table 2). This high contact value is in line with
360 results for the double steel grid system presented by Larsen et al. (2016), which showed that
361 redfish were effective at contacting the upper grid of the section tested. This indicates, that
362 compared with cod, which have been reported multiple times to seek outlets in a mainly
363 downwards direction (Engås and Godø, 1989; Wardle, 1993; Grimaldo et al., 2017), redfish
364 seek outlets more actively and also upwards, similar to other species, such as haddock
365 (Winger et al. 2010). Even if the C_{panel} values for redfish were high, the $L50_{panel}$ values
366 estimated for the panel were low, indicating that the mesh size used in the panel was too small
367 for redfish. Based on the design guide for redfish provided by Herrmann et al. (2013) we
368 would expect a higher $L50_{panel}$ than the one estimated here. However, this result from
369 Herrmann et al. (2013) was obtained for another mesh type than square meshes, therefore this
370 result should only be used as indicative here. For optimal escape through the square mesh
371 panel the fish would need to attack the mesh perpendicularly (angle of attack = 90°). If the
372 actual attack angle is lower than 90° , the projected mesh becomes rectangular and the opening
373 becomes smaller (see Krag et al. (2014) for the concept of mesh projection). We could
374 speculate that this is the reason for the low values obtained for $L50_{panel}$ for both cod and
375 redfish. Specifically, if we assume that the attack angle is as low as the grid angle (23°), the
376 mesh would look like a rectangular mesh with a shape of 28 x 72 mm. This mesh could

377 thereby potentially explain low values obtained for $L50_{panel}$ (Table 2), although we could
378 expect that to some extent fish would adjust their angle of attack on their way to the square
379 mesh panel. As we assume that the obtained low $L50_{panel}$ values are the main cause to the
380 unanticipatedly low $L50_{panel}$ values, changes in the projected mesh (shape and size) would
381 potentially improve the selectivity performance of the panel and the sorting efficiency of the
382 section. Based on the above speculation, there are two obvious ways to increase $L50_{panel}$.
383 First, to improve the attack angle for the fish towards the square mesh panel increasing the
384 grid angle, and second, to use rectangular meshes instead of square meshes so that the
385 projected mesh would become a square mesh that corresponds with the desired mesh size.
386 The high C_{panel} values estimated for both species showed that the concept of guiding fish
387 towards a second device with the grid was successful (Table 2). Combining this with the
388 above described potential ways of improving $L50_{panel}$, we believe that the new sorting concept
389 presented in this study can have a potential if those modifications are applied.

390 **Acknowledgments**

391 We are grateful to the crew of RV ‘Helmer Hanssen’ for their valuable help during the cruise.
392 We also want to thank the Directorate of Fisheries, the Research Council of Norway (RCN
393 project 243627), and the University of Tromsø for their financial support. Finally, we want to
394 express our gratitude to the two anonymous reviewers for their valuable comments during the
395 review process.

396 **References**

397 Alzorritz N., Arregi L., Herrmann B., Sistiaga M., Casey J., Poos J.J., 2016. Questioning the
398 effectiveness of technical measures implemented by the Basque bottom otter trawl fleet:
399 implications under the EU landing obligation. Fish. Res. 175, 116–126.

- 400 Anthony, P.D., Hawkins, A.D. 1983. Spectral sensitivity of the cod, *Gadus morhua* L. Mar.
401 Behav. Physiol. 10, 145–166.
- 402 Brčić, J., Herrmann, B., Sala, A., 2016. Can a square-mesh panel inserted in front of the
403 codend improve the exploitation pattern in Mediterranean bottom trawl fisheries? Fish.
404 Res. 183, 13-18.
- 405 Broadhurst, M.K. 2000. Modifications to reduce bycatch in prawn trawls: A review and
406 framework for development. Rev. Fish. Biol. Fish. 10: 27–60.
- 407 Catchpole, T.L., Revill, A.S. 2008. Gear technology in Nephrops trawl fisheries. Rev. Fish
408 Biol. Fish. 18, 17–31.
- 409 Efron, B., 1982. The jackknife, the bootstrap and other resampling plans. SIAM Monograph
410 No 38, CBSM-NSF.
- 411 Engås, A., Godø, O.R., 1989. The effect of different sweep lengths on the length composition
412 of bottom-sampling trawl catches. J. Cons. Int. Explor. 45, 263–268,
- 413 Fryer, R.J., 1991. A model of between-haul variation in selectivity. ICES J. Mar. Sci. 48,
414 281–290.
- 415 Gjørund, S.H., 2012. Simplified approximate expressions for the boundary layer flow in
416 cylindrical sections in plankton nets and trawls. Open J. Marine Sci. 2, 4.
- 417 Grimaldo, E., Sistiaga, M., Herrmann, B., Gjørund, S.H., Jørgensen, T., 2015. Effect of the
418 lifting panel on selectivity of a compulsory grid section (Sort-V) used by the demersal
419 trawler fleet in the Barents Sea cod fishery. Fish. Res. 170, 158–165.
- 420 Grimaldo, E., Sistiaga, M., Herrmann, B., Larsen, R.B., Brinkhof, J., Tatone, I., 2017.
421 Improving release efficiency of cod (*Gadus morhua*) and haddock (*Melanogrammus*
422 *aeglefinus*) in the Barents Sea demersal trawl fishery by stimulating escape behaviour.
423 Can. J. Fish. Aquat. Sci. Published on the web 3 May 2017.
- 424 Herrmann, B., Sistiaga, M., Nielsen, K.N., Larsen, R.B., 2012. Understanding the size
425 selectivity of redfish (*Sebastes* spp.) in North Atlantic trawl codends. J. North Atlan.
426 Fish. Sci. 44, 113.
- 427 Herrmann, B., Wienbeck, H., Karlsen, J.D., Stepputtis, D., Dahm, E., and Moderhak, W.
428 2014. Understanding the release efficiency of Atlantic cod (*Gadus morhua*) from trawls

- 429 with a square mesh panel: effects of panel area, panel position, and stimulation of
430 escape response. *ICES J. Mar. Sci.* 72, 686–696.
- 431 Herrmann, B., Sistiaga, M., Larsen, R.B., Nielsen, K.N., 2013. Size selectivity of redfish
432 (*Sebastes* spp.) in the Northeast Atlantic using grid-based selection systems for trawls.
433 *Aquat. Living Resour.* 26. 109–120.
- 434 ICES, 2016. ICES Advice. *Sebastes Marinus* in Subareas I and II.
435 <http://ices.dk/sites/pub/Publication%20Reports/Advice/2016/2016/smr-arct.pdf>
- 436 Jørgensen, T., Ingolfsson, O.A., Graham, N., Isaksen, B., 2006. Size selection of cod by rigid
437 grids—is anything gained compared to diamond mesh codends only? *Fish. Res.* 79,
438 337–348.
- 439 Krag, L.A., Herrmann, B., Iversen, S., Engås, A., Nordrum, S., Krafft, B.A., 2014 Size
440 selection of Antarctic krill (*Euphausia superba*) in trawls. *PloS ONE* 9(8), e102168.
- 441 Larsen, R.B., Herrmann, B., Sistiaga, M., Grimaldo, E., Tatone, I., Onandia, I., 2016. Size
442 selection of redfish (*Sebastes* spp.) in a double grid system: Quantifying escapement
443 through individual grids and comparison to former grid trials. *Fish. Res.* 183, 385-395.
- 444 Larsen, R.B., Isaksen, B., 1993. Size selectivity of rigid sorting grids in bottom trawls for
445 Atlantic cod (*Gadus morhua*) and haddock (*Melanogrammus aeglefinus*). *ICES Mar.*
446 *Sci. Symp.* 196, 178–182.
- 447 Lövgren, J., Herrmann, B., Feekings, J., 2016. Bell-shaped size selection in a bottom trawl: A
448 case study for Nephrops directed fishery with reduced catches of cod. *Fish. Res.* 184,
449 26-35.
- 450 Planque, J., Nedreaas, K., 2015. Uer. Snabeluer og vanlig uer i Norskehavet og Barentshavet.
451 In: Bakketeig, I.E., Gjørseter, H., Hauge, M., Sunnset, B.H., og Toft Ø., K. (Eds.),
452 *Fisken og havet, særnr. 1. Havforskningsrapporten*, pp. 205–206 ('The redfishes in the
453 Norwegian Sea and the Barents Sea.' In Norwegian with English legends).
- 454 Sistiaga, M., Brinkhof, J., Herrmann, B., Grimaldo, E., Langård, L., Lilleng, D., 2016. Size
455 selective performance of two flexible sorting grid designs in the Northeast Arctic cod
456 (*Gadus morhua*) and haddock (*Melanogrammus aeglefinus*) fishery. *Fish. Res.* 183,
457 340-351.
- 458 Sistiaga, M., Herrmann, B., Grimaldo, E., Larsen, R.B., 2010. Assessment of dual selection in
459 grid based selectivity systems. *Fish. Res.* 105, 187-199.

- 460 Wardle, C., 1993. Fish behaviour and fishing gear. In: Pitcher, T.J. (Ed.), Behaviour of
461 Teleost Fishes. Chapman and Hall, London, pp. 607–643.
- 462 Westhoff, C.J.W., Pope, J.A., Beverton, R.J.H. 1962. The ICES mesh gauge. Charlottenlund
463 Slot, Charlottenlund, Denmark. 15 pp.
- 464 Wileman, D.A., Ferro, R.S.T., Fonteyne, R., Millar, R.B. (Eds.), 1996. Manual of methods of
465 measuring the selectivity of towed fishing gears. ICES Cooperative Research Report
466 No. 215.
- 467 Winger, P.D., Eayrs, S., Glass, C.W., 2010. Fish behaviour near bottom trawls. In: He, P.
468 (Ed.), Behavior of Marine Fishes: Capture Processes and Conservation Challenges.
469 Wiley-Blackwell, Ames, Iowa, pp. 67–103.
- 470 Yaragina, N.A., Aglen, A., Sokolov, K.M. 2011. Cod. In: The Barents Sea, ecosystem,
471 resources, management. Half a Century of Russian–Norwegian cooperation. Edited by
472 T. Jakobsen and V.K. Ozhigin. Tapir Academic Press, Trondheim, Norway. pp. 225–
473 270.

Table 1: Summary of the number of cod and redfish caught and length-measured in each individual haul conducted. *ng*: number in lower cover (grid). *np*: number in upper cover (square mesh panel). *nc*: number in blinded codend.

Haul	Cod			Redfish		
	<i>ng</i>	<i>np</i>	<i>nc</i>	<i>ng</i>	<i>np</i>	<i>nc</i>
1	6	1	31	1	25	2
2	10	0	146	2	7	0
3	0	0	331	3	6	0
4	19	0	171	4	17	2
5	12	1	77	5	31	4
6	1	1	15	6	24	5
7	3	2	78	7	47	2
8	37	4	278	8	16	2
9	10	2	70	9	23	1
10	7	0	61	10	12	2
11	4	0	75	11	5	0
12	15	1	67	12	10	0
13	20	2	176	13	21	1
14	7	5	105	14	12	1
15	10	2	97	15	12	1
16	13	3	128	16	21	2
17	14	4	119	17	20	4
18	30	2	380	18	4	1
19	6	4	94	19	17	0
20	7	3	191	1	25	2
Sum	231	37	2690	330	30	971

Table 2: Parameter values for the model and fit statistics. $L50$ is the length at which a fish has a 50% chance of being retained and SR is calculated by subtracting $L25$ from $L75$. C_{grid} quantifies the fraction of fish entering the section that makes selectivity contact with the grid whereas C_{panel} quantifies the fraction of fish making selectivity contact with the square mesh panel. DOF denotes degree of freedom. Values in () are 95% confidence limits. *: not defined.

	Cod	Redfish
$L50_{comb}$ (cm)	41.41 (32.95-44.39)	29.33 (26.96-31.94)
SR_{comb} (cm)	25.64 (*-32.78)	13.14 (11.32-15.30)
C_{grid} (%)	51.24 (40.84-71.17)	86.44 (77.33-100.00)
$L50_{grid}$ (cm)	48.19 (43.35-50.75)	30.40 (26.02-33.78)
SR_{grid} (cm)	7.22 (4.95-10.53)	12.42 (9.65-15.81)
C_{panel} (%)	100.00 (4.22-100.00)	100.00 (70.13-100.00)
$L50_{panel}$ (cm)	22.98 (18.56-59.94)	16.38 (13.55-20.91)
SR_{panel} (cm)	16.84 (0.10-19.33)	9.73 (5.84-11.54)
p-value	>0.999	0.848
Deviance	104.26	96.7
DOF	200	112

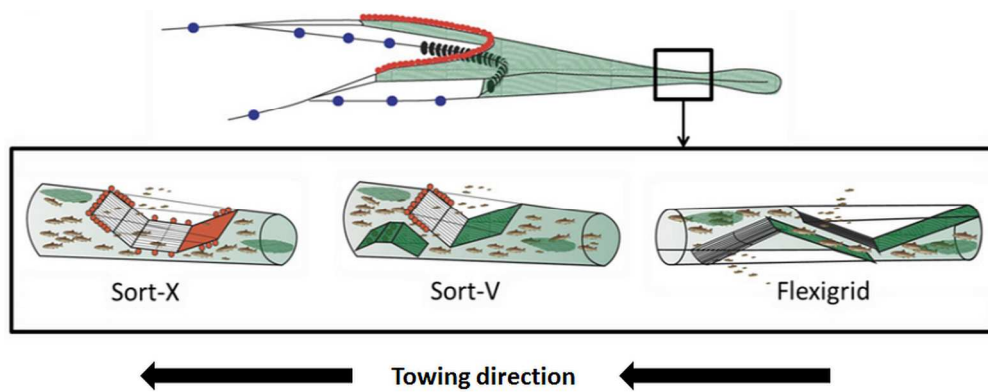


Fig. 1: Legal grids for the North-East Arctic gadoid trawl fisheries.

170x67mm (300 x 300 DPI)

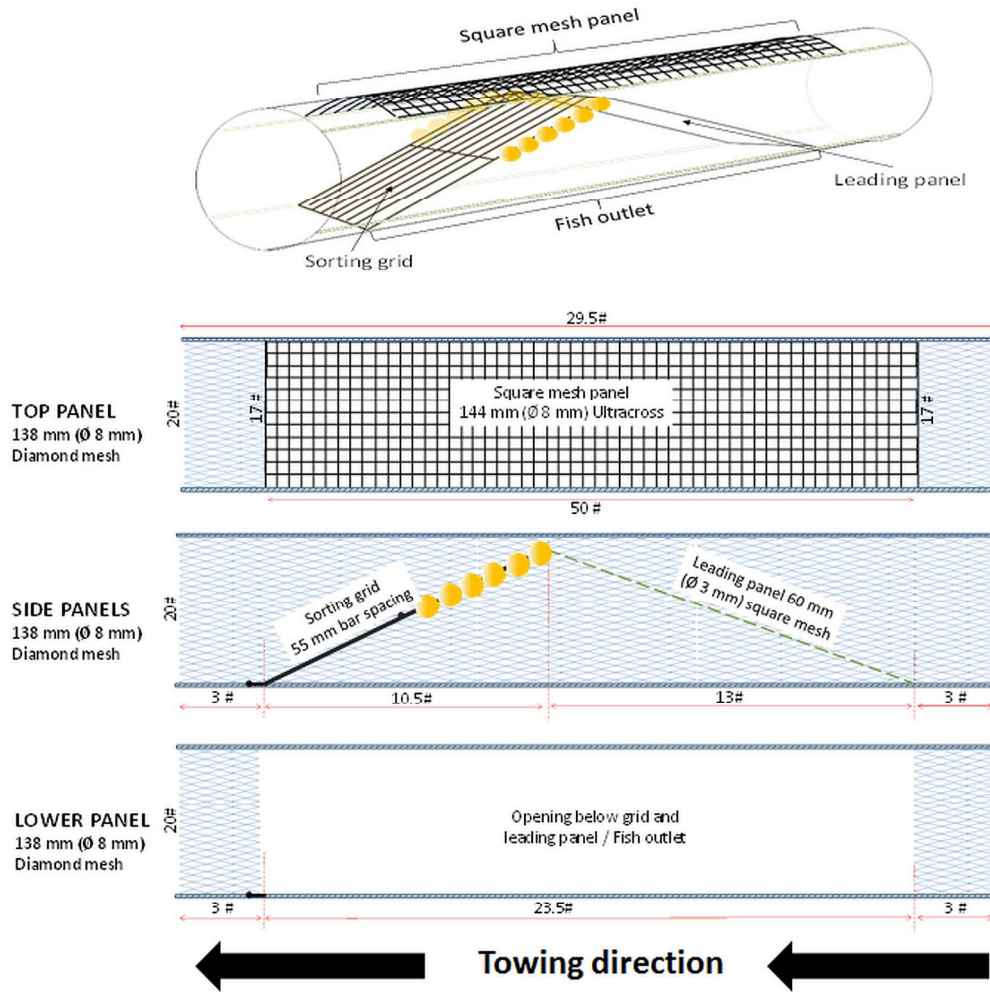


Fig. 2: Schematic representation of the experimental grid section with the top square mesh panel used in the sea trials.

170x171mm (300 x 300 DPI)

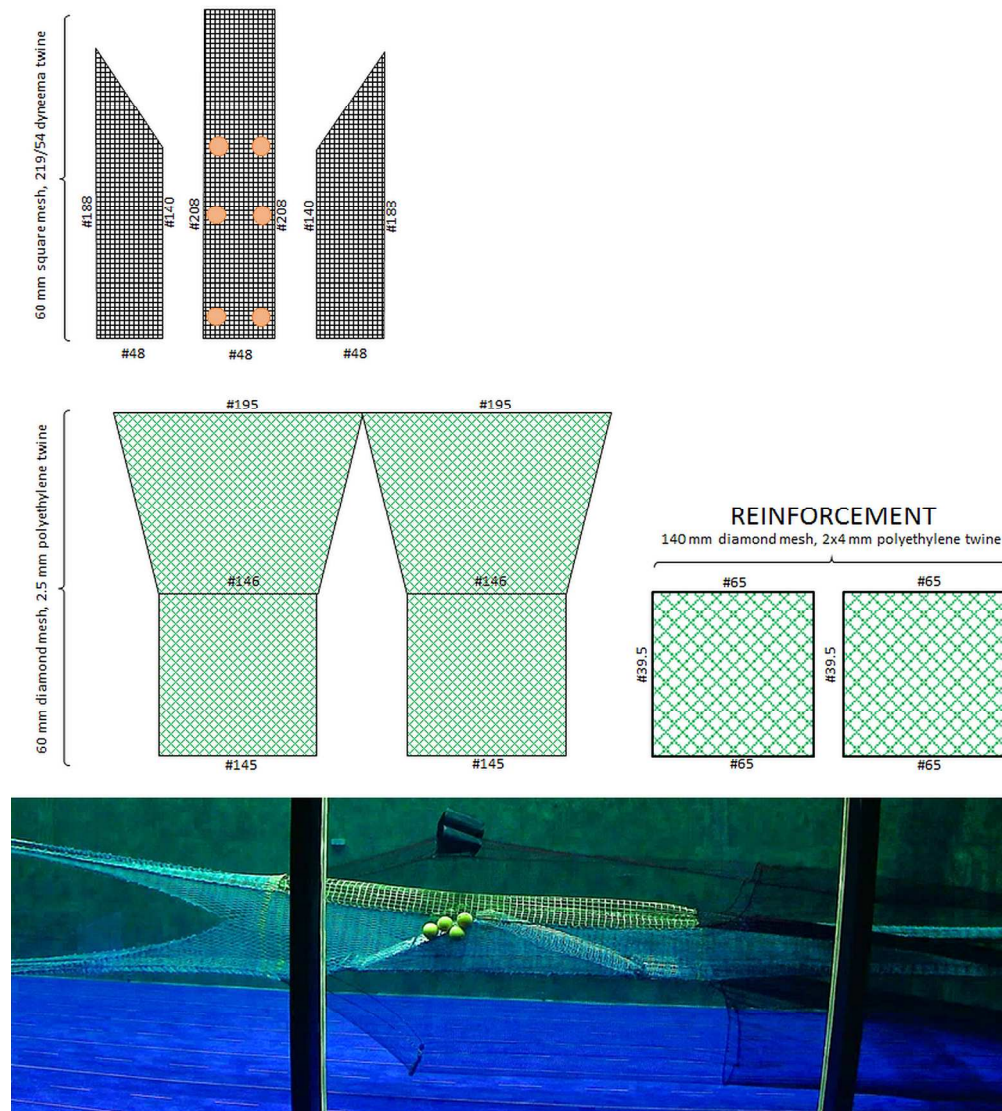


Fig. 3: Technical specification of the covers used over the outlet of the grid and the square mesh panel. The picture below shows a snapshot of the tests carried out with the section and the covers in the flume tank before the tests at sea. Note that the kites used in the cover over the square mesh panel in the tests in the flume tank were substituted by six 20-cm floats during the trials at sea. The floats were fixed as specified in the drawing.

170x188mm (300 x 300 DPI)

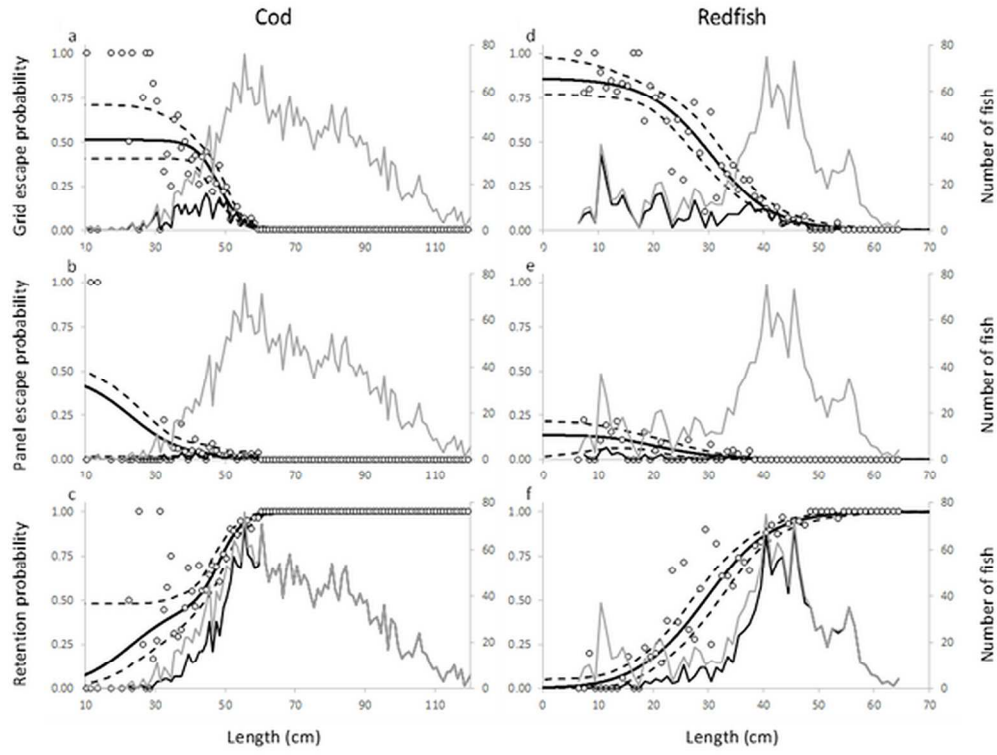


Figure 4: Panels a, b and c show the escapement through grid, escapement through square mesh panel and the combined retention in codend for cod, respectively. Panels d, e and f show the same for redfish. Circles represent the experimental rates and the thick black curve represents the modeled rate based on Equation (1). The stippled curves show 95% confidence limits for the modeled rate. The gray curve represents the population of cod (left column) or redfish (right column) entering the sorting section, while the thin black curve represents the population found in the specific compartment (grid cover, square mesh panel cover and cod end).

170x128mm (300 x 300 DPI)

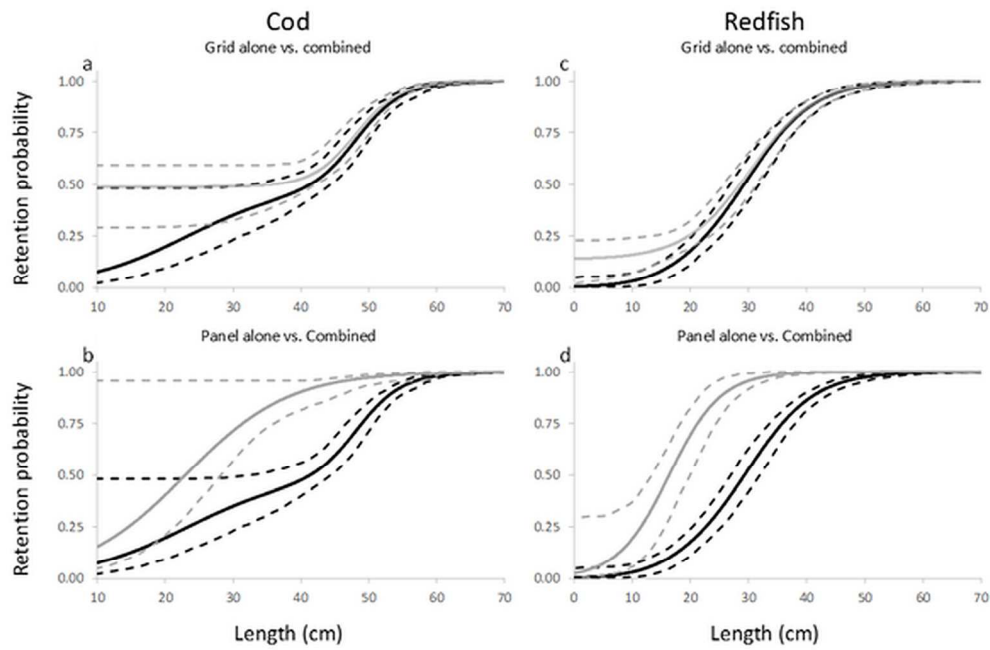


Figure 5: Comparison of the combined size selection in the sorting section (black curve) with that estimated for the grid and square mesh panel alone (gray curve). a: Overall selection versus grid for cod. b: Overall selection versus square mesh panel for cod. c: Overall selection versus grid for redfish. d: Overall selection versus square mesh panel for redfish. The stippled curves show 95% confidence limits for each selectivity curve.

170x111mm (300 x 300 DPI)

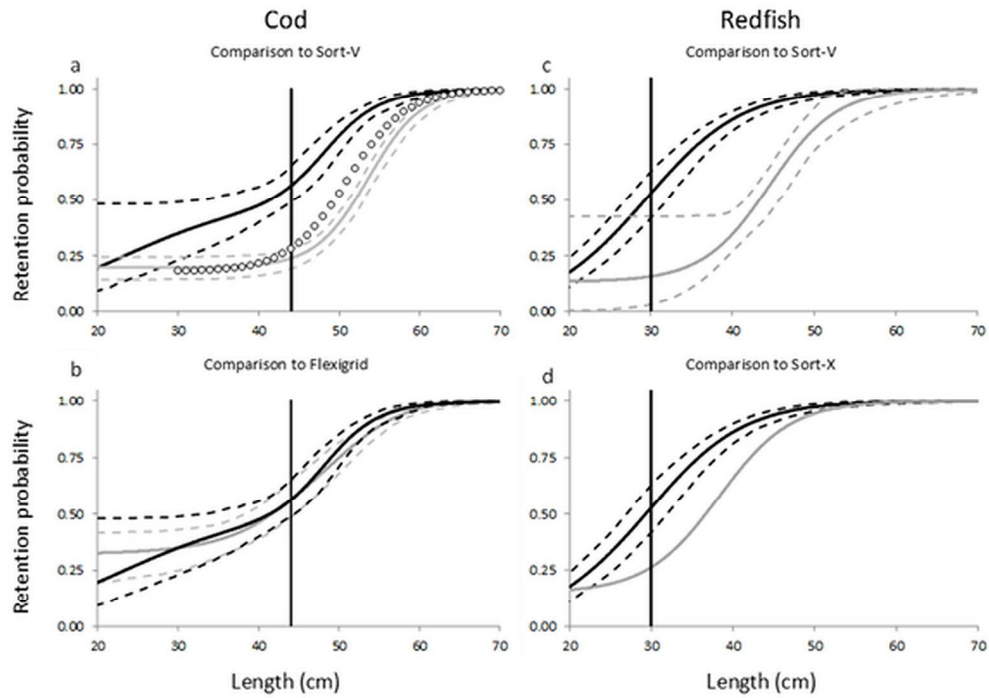


Figure 6: Comparison of the size selectivity for the new sorting section (black curve) with results available in the literature for other sorting grid sections (gray curve and circles). The stippled curves show 95% confidence limits for each selectivity curve. a: cod results compared with results for the Sort-V grid results of Sistiaga et al. (2010) (gray curve) and Grimaldo et al. (2015) (circles). b: cod results compared with results for the Flexigrid system (gray curve) presented by Sistiaga et al. (2016). c: redfish results compared with results for the Sort-V grid (gray curve) obtained by Herrmann et al. (2013). d: redfish results compared with results for the Sort-X grid (gray curve) presented by Herrmann et al. (2013).

170x119mm (300 x 300 DPI)

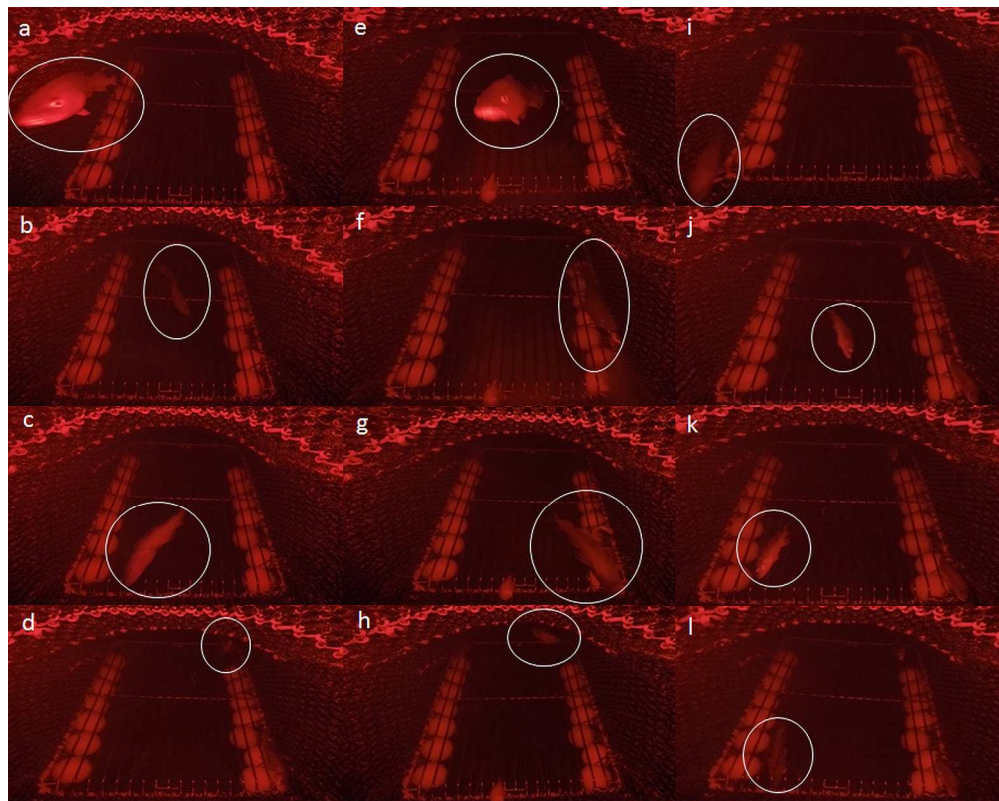


Figure 7: Snapshots from the underwater recordings showing cod trying to swim downwards once they felt the sorting grid (a-d and e-h), and cod first swimming downwards and passing through the grid after making selectivity contact with it (i-l).

170x135mm (300 x 300 DPI)

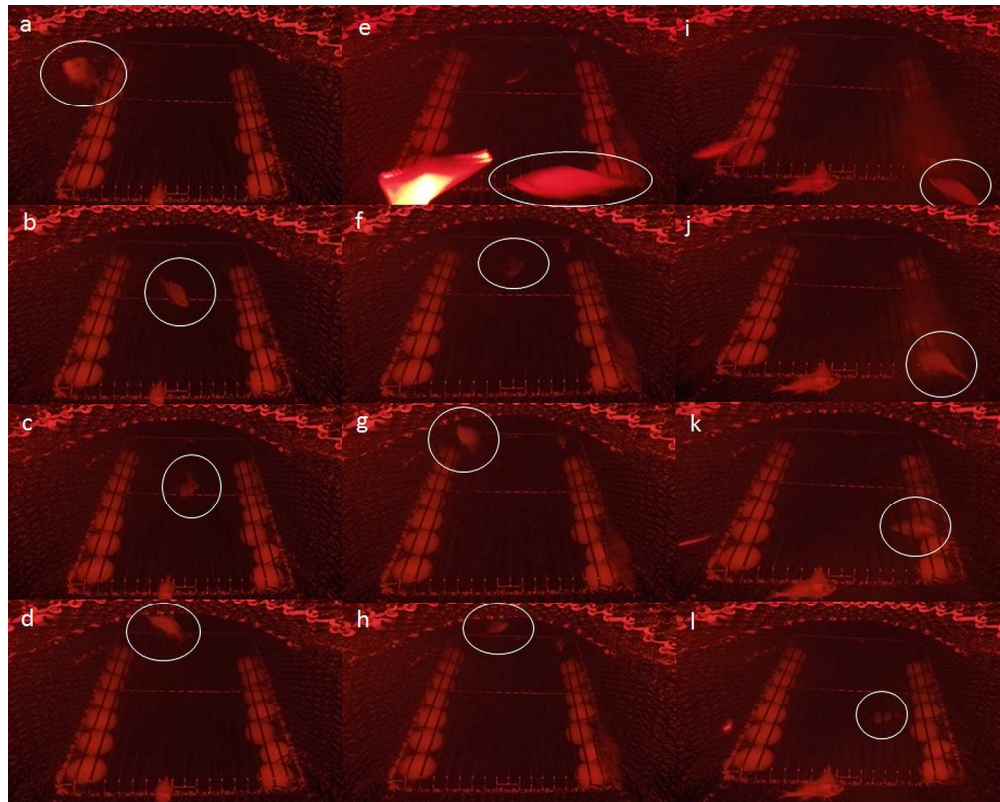


Figure 8: Snapshots a-d and e-h show two sequences where redfish first attempt to escape through the grid and after not being able to pass through the grid they contact the square mesh panel. The snapshots in sequence i-l show a redfish successfully escaping through the grid.

170x135mm (300 x 300 DPI)